


ASCII Table


Quick Guide

Gun Type Wireless Handheld Scanner

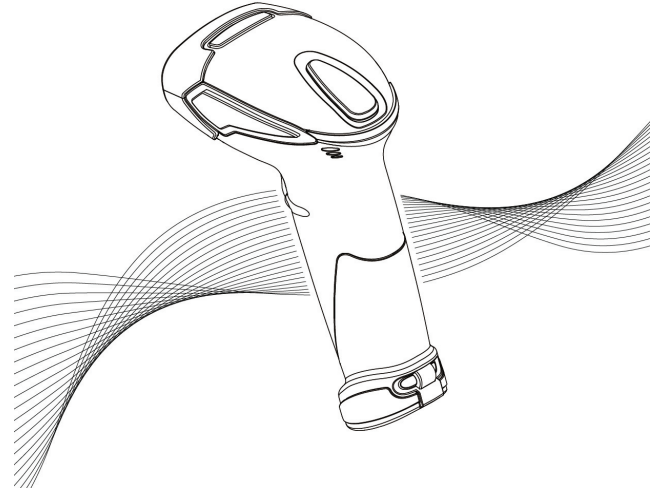

593-N319XB-002 Ver.A

Scanner Outline

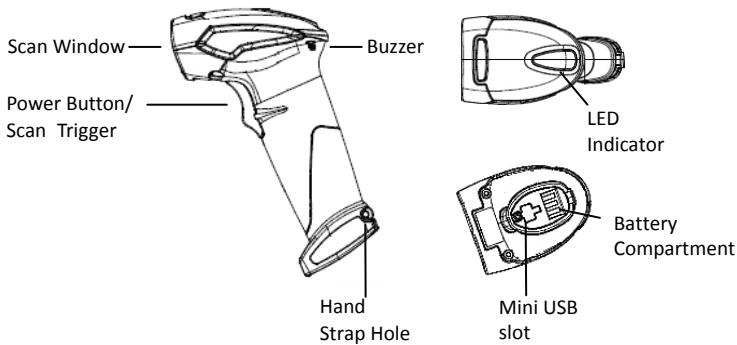

Description	Function
Scan Window	Emits a red beam for barcode reading
Power Button/Scan Trigger	Press and hold for 1 second until a long beep is heard to turn power on or press to scan barcodes
Hand Strap Hole	Used to attach hand straps
LED Indicator	Indicates the scanning status
Battery Compartment	Secured by a screw, battery is stored here
Mini USB slot	Used for communication and charging

Package Contents

Items in the package may vary depending on the model of the scanner.

Wireless scanner with battery /
Scanner cradle (optional)



Quick Guide



Li-ion battery pack



Mini USB B to mini USB A cable/
Communication cable (optional)



5V USB Power adapter



Cable clip



*Note: Actual product appearance may differ from the images on this page.

Installation

- **Battery:** Unscrew the cap to install battery.



- **Cable clip:** Attach clip by pushing and turning as illustrated; use the clasp to hold the cable.



- **Cradle:** Connect Mini USB cable and communication cable to the cradle as illustrated,



Pairing the Device

Cradle Host Mode

1. Connect the cradle and the computer using the cables. Please make sure the cradle LED is flashing blue indicating it's not linked to any scanner.
2. Power on the scanner and scan the following barcodes: Start Of Configuration, Cradle Host mode enable, and End Of Configuration to enable Cradle Host mode.



3. Scan the pairing barcode attached at the bottom of the cradle to begin pairing. 3 short beeps will be heard.
4. The LED indicator on the scanner will flash blue rapidly indicating search mode in progress. LED on the cradle will become steady blue when the pairing is successful.
5. To set the host interface for the cradle, scan the corresponding barcode label found in the System Settings in the User's Manual.

BT HID/Smart Phone Mode

1. Power on the scanner and program it with "BT HID Mode." To connect to a smart phone (ie. iPhone, Android), the Smart phone mode must also be enabled.



2. Enable wireless discovery on your smart phone. (see your phone's user's manual for instructions)
3. The scanner should be on the list of discoverable devices. The default name of the scanner is "ZBBT". Select "ZBBT" from the list and a pin code will appear on your smart phone.
4. To input the pin code, use the scanner to scan the barcodes in the ASCII table found in the previous section. For example: if the pin code is "0111", scan "0", "1", "1", "1" from the ASCII barcode labels.
5. Scan the Enter barcode in the ASCII table to confirm.
6. A short beep should be heard upon connection.

SPP Client Mode (PC as Host)

In this mode, the scanner is discoverable from a remote device and it can request the scanner for connection. There are several ways to connect the wireless scanner to your PC. Please check the corresponding guides for more details on how to configure your host device's wireless connections.

1. Turn on the host computer and activate its wireless connection.
2. Power on the scanner and program it with "SPP Client mode" label.



3. In the host computer, execute the discovering procedure and find the scanner.
4. Scanner should be on the list of discoverable devices. The default name of the scanner is "ZBBT". Select "ZBBT" and click "Next".
5. Select "Let me choose my own passkey" and enter the pin code. The default pin code is "12345678" (must be at least 4 digits and not more than 8 numeric digits).
6. Click "Next" to connect the scanner to the host. A short beep should be heard upon connection.

SPP Host Mode (Scanner as Host)

In this mode, the scanner initiates the connection to the remote device.

1. Power on of the remote device and have its address ready in hand and make it discoverable.
2. Program the scanner with the "SPP Host enable" barcode.



3. Scan "Set wireless address" to set the address.




4. Scan "Set wireless address" to set the address.



5. Use the ASCII table in previous section to input the 12 digit wireless address. For example: if the address is "011B1345600", scan "0", "0", "1", "1", "B", "1", "3", "4", "5", "6", "0", "0" from ASCII barcode labels. Or scan the address label if available.

6. Scan "Confirm Setting" to store the address.



7. Setup and input the pin code if necessary. Scan "Required Pair with client (SPP Host)" to begin pairing.

